


Zitrux

The first changes it all.



Zitrox

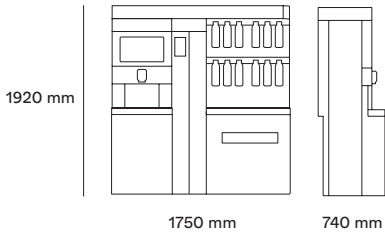


Specifications

Fruit type	Oranges	
Diameter of fruit	M Kit: 65-81 mm	
Fruits per minute	40 fruits / min	
Rate (juice / 250 ml)	1 juice in 5"	
Tap operator	Touchless. No hand-tap contact. Actuation by positioning the bottle	
Type of consumption	Very high	
Feeder capacity	70 kg 154 lbs	
Waste capacity	120 l	
Bottle holder	38mm	
Voltage	208–240 V 50/60 Hz	
Power output	Squeezing	249 W 0.33 HP
	Cleaning with detergent	260 W 0.34 HP
Consumption	Squeezing	1.2A
	Cleaning with detergent	10.4A

Installation specifications

Water Hardness	Between 5°FH y 8°FH (Soft Water)
Water inlet connection	G3/4 Female minium 12liters/ minute at a 2,5 bar (250 kPa)
Drain connection	Corrugated drain pipe Diameter 20mm

Features:



Colour:



Technical Information

Safety	Double security detector in accesses to mobile elements. Motor locking detection mechanism.	
Sound pressure level	Below 70 dB	
Connectivity	GSM & WIFI	
Filling height	296 mm	
Bottle capacity. 4 trays for bottle lines. Capacity according to bottle type	1L bottles	96 bottles
	50 cl bottles	122 bottles
	33 cl bottles	122 bottles
	25 cl bottles	144 bottles

Measurements

Measurements	1750 x 740 x 1920 mm
Width Depth Height	68.8" x 29.1" x 75.5"
Net weight	325 kg / 716.5 lb
Footprint	1,29 m²


Packaging

Dimensions package 1	800 x 810 x 2100 mm
Width Depth Height	34,6" x 31.9" x 82.6"
Package weight 1	204.5 kg 450.8 lb
Dimensions package 2	800 x 1280 x 2100 mm
Width Depth Height	31.5" x 50.4" x 82.6"
Package weight 2	177.7 kg 391.7 lb

Cleaning

Juice unit cleaning	Automatic
Juice unit rinsing, tap	Automatic

Models:



Acc. and more info:

