


# LAF Bar Product specifications

Bar Countertop Unit (Dispenser)	
Dimensions	(WxHxD) 8.27 x 22.76 x 12.52 inches
Weight	17.86 lbs
Power	24 V connected with special cable (included)
Package Dimensions	15.4 x 11 x 25.8 inches
Dispense Speed	Up to 0.317 gal/min* (LAF Bar) up to 0.423 gal/min* (LAF Bar Pro)
Counterspace	Leave at least 7.9 inches free space behind machine for proper ventilation and connections cutout.

\*depending on foam texture

Undercounter Unit (Milk + Refrigerator Module)	
Dimensions	(WxHxD) 8.72 x 22.46 x 20.53 inches
Weight	52.25 lbs
Power	Fridge: 120V~; 60Hz; 1A; 1x NEMA 5-15 LAF: 120V~; 60Hz; 20A; 1x NEMA 5-20
Water Supply	Water Treatment: Free from undissolved solids. Mechanical Filtration: 10 µm. Carbonate Hardness: ≤5°dKH. Connection: 3/8 female connector. Pressure: > 14.5 PSI < 115 PSI
Water Drainage	yes, 1x 0.24 inches drain tube
Package Dimensions	(WxHxD) 30.7in x 13.8in x 25.8 inches
Environment	Humidity: ≤80% relative humidity, no condensation Temperature: +41 °F to +95 °F

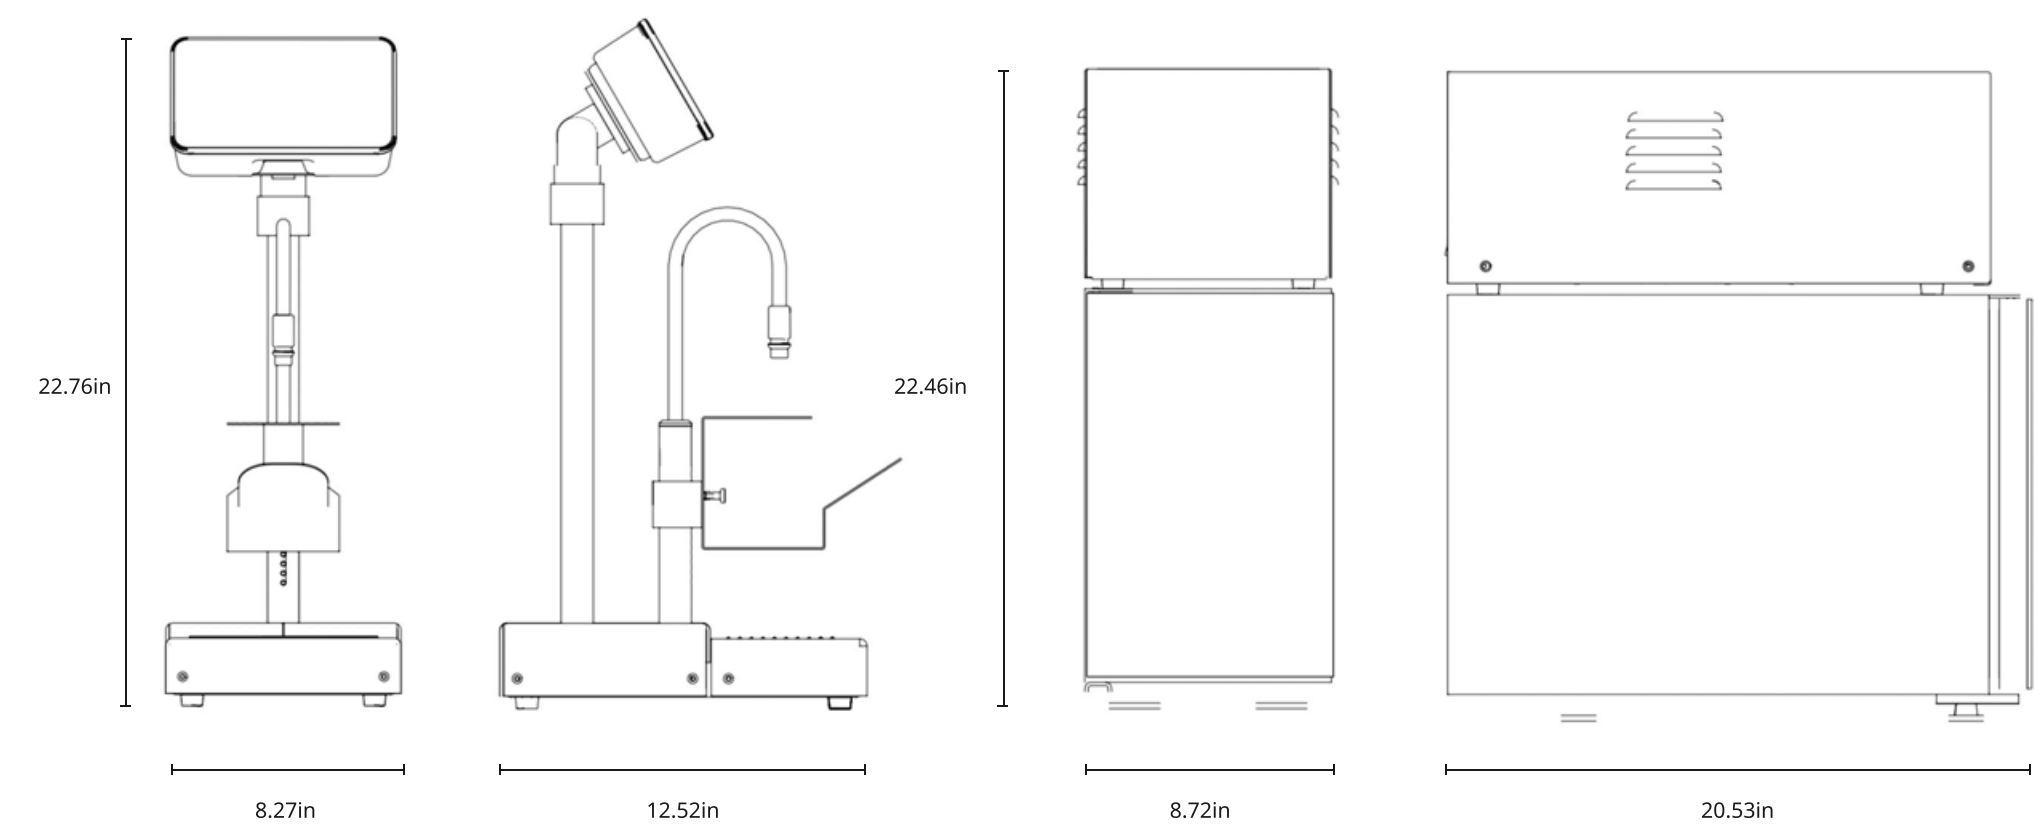

Dimensions (WxHxD): 8.27 x 22.76 x 12.52 inches  
and 8.72 x 22.46 x 20.53 inches



LAF Bar – fridge and module under the counter



Standard fridge setup with 3.7L (1 gal) container



Extra fridge setup: 2x 3.7L (1 gal) containers



Custom setup: 3.7L (1 gal) container + custom fridge