



XAVC-06FS-EQRM

Project	_____
Item	_____
Quantity	_____
Date	_____

Model
CHEFTOP MIND.Maps™ CONVEX

Convection oven	Electric
6 18" x 26"	Hinge on the left side
9.5" Touch control panel	
Voltage: 240V 3N~ / 208V 3N~	



Description

Concrete, robust and easy to use convection oven, ideal for handling traditional cooking processes (baking, roasting and browning). It uses the AIR.Plus technology to distribute heat throughout the cooking chamber, ensuring uniformity and fast cooking times. Ideal for kitchens looking for maximum results, with minimum investments.

Standard cooking features

Manual cooking

- **Temperature:** 86 °F - 500 °F
- Up to 9 cooking steps
- **Fan speed:** 2 settings

Programs

- **384 Programs**
- **MULTI.TIME:** manage up to 10 cooking processes at the same time

Advanced and automatic cooking features

Unox Intensive Cooking

AIR.Plus: multiple fans with reverse gear and 2 speed settings

Unox Intelligent Performance

- **ADAPTIVE.Cooking™:** automatically regulates the cooking parameters to ensure repeatable results
- **SMART.Preheating:** automatically sets the preheating temperature and duration





XAVC-06FS-EQRM

Key features

- Cooking chamber in high-resistance AISI 304 stainless steel with rounded edges
- Double glass
- Cooking chamber lighting through LED lights embedded in the door
- Tray supports with anti-tip system
- Drip collection system Integrated in the door which works even when the door is open
- 2-speed fan system and high-performance heating elements
- Integrated Wi-Fi
- Wi-Fi / USB data:** download/upload HACCP data
- Wi-Fi / USB data:** download/upload programs


App and web services

- **Data Driven Cooking app & webapp:** check and monitor in real-time the operating conditions of your ovens, create and share new recipes. Artificial intelligence transforms consumption data into useful information and allows you to increase daily profits

Accessories

- **LIEVOX:** Proofer equipped with sensors capable to control and intervene automatically on the leavening process
- **Neutral cabinet:** recommended solution to optimize your kitchen layout and always have everything in the right place
- **Stand:** the multifunctional support ideal for storing trays safely and placing your oven at the perfect height to work
- **QUICK.Load** and trolley system
- **Cooking Essentials:** special trays

XAVC-06FS-EQRM

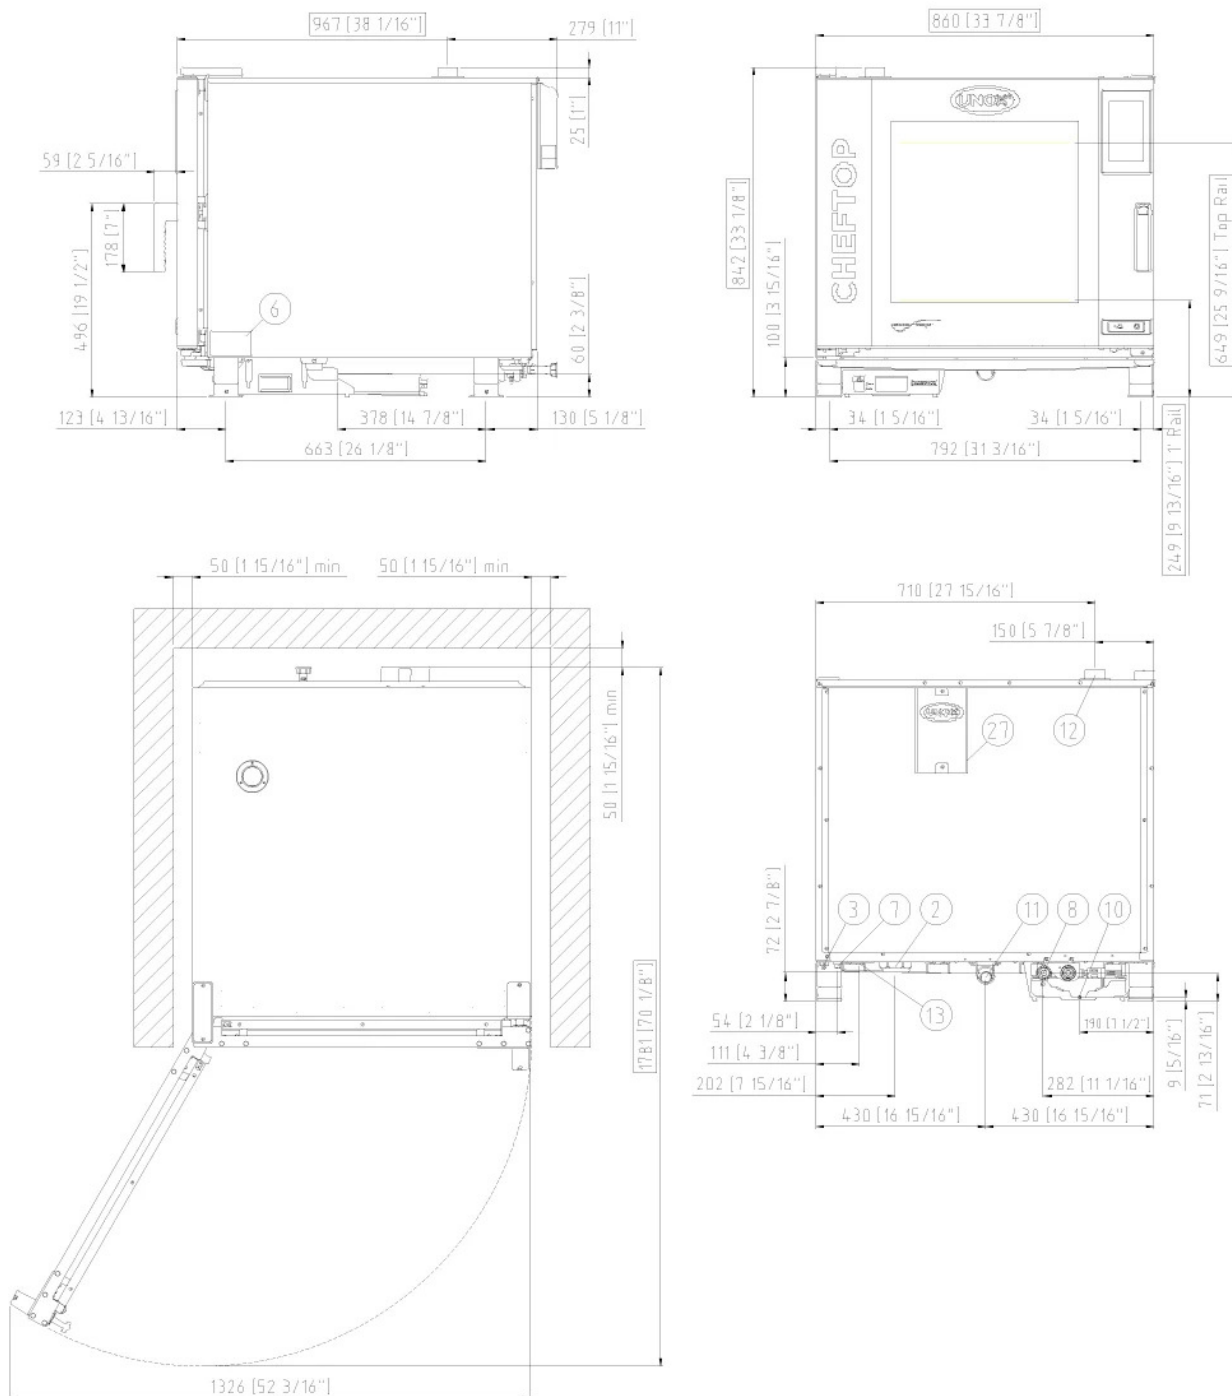

Dimensions and weight

Width	33-7/8"	860 mm
Depth	38-1/16"	967 mm
Height	33-1/8"	842 mm
Net weight	247 lbs	112 kg
Tray pitch	3-1/8"	80 mm

Connection positions

2	Terminal board power supply
3	Unipotential terminal
6	Technical data plate
7	Safety thermostat
8	3/4" female NPT water inlet
10	Rotor.KLEAN™ inlet

11	Chamber drain pipe
12	Hot fumes exhaust chimney
13	Accessories connection
27	Cooling air outlet



XAVC-06FS-EQRM

Electrical power supply

OPTION A

Voltage	240 V
Phase	~3PH+PE
Frequency	60 Hz
Total power	19 kW
Max Amp draw	47 A
Required breaker size	60 A
Power cable requirements*	4 x AWG 6
Plug	X X

OPTION B

Voltage	208 V
Phase	~3PH+PE
Frequency	60 Hz
Total power	14.5 kW
Max Amp draw	41.5 A
Required breaker size	50 A
Power cable requirements*	4 x AWG 8
Plug	X X

*Recommended size - observe local ordinance.

Installation requirements

Unox products must be installed in facilities where all the systems (gas, electric, hydraulic, ventilations, aerations, etc.) comply with the current national standards. Combustion analysis must be performed in case of gas ovens.

Register to DDC Service to access data and product specifications.

www.ddc.unox.com