



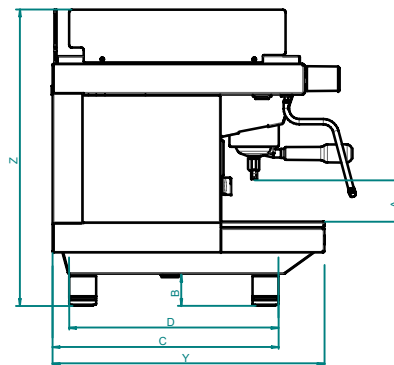


DIMENSION	MEASURE	2 GR
LENGHT (X)	inch (mm)	20 - 7/8 (530)
DEPTH (Y)	inch (mm)	20 - 3/4 (528)
HEIGHT (Z)	inch (mm)	23 - 1/2 (543)
HEIGHT FROM THE DISPENSING SPOUT GRILLED CUP REST (MIN/MAX) (A)	inch (mm)	3 - 5/8 (93)
HEIGHT FROM EXHAUST TO BASE (MIN/MAX) (B)	inch (mm)	2 - 5/16 (58)
SUPPORT DEPTH (C)	inch (mm)	16 - 5/16 (416)
SUPPORT DIMENSION (D)	inch (mm)	15 (386)
CUP WARMER SHELF DIMENSION	inch ² (cm ²)	338 (2187)
WEIGHTS	MEASURE	2 GR
NET WEIGHT	Lb (Kg)	99 (45)
SHIPPING WEIGHT	Lb (Kg)	112 (51)
OPERATING WEIGHT	Lb (Kg)	110 (50)
POWER	MEASURE	2 GR
TOTAL POWER	W	(model 1) 1400 -1700 (model 2) 2200 - 2800
REDUCED TOTAL POWER		NA
SUPPLY VOLTAGE	Vac	(model 1) 110 - 120 V 1N - 60 Hz (model 2) 208 - 240 V 1N - 60 Hz
FULL LOAD AMP DRAW	A	(model 1) 12,7-14 (model 2) 10,4-11,7
MAX. DIST. FROM OUTLET	ft	5
NEMA PLUG AND OUTLET		(model 1) 5-20P - 5-20R (model 2) 6-15P - 6-15R
WATER	MEASURE	2 GR
WATER INLET LINE PRESSURE	PSI/BAR	14 - 87 / 1 - 6
DYNAMIC WATER PRESSURE	PSI/BAR	87 / 6
WATER MIN.PIPE SIZE DIAMETER	inch	3/8"
WATER CONNECTION	inch	3/8" male
EXTERNAL PUMP	MEASURE	2 GR
DIMENSIONS	inch	NA
MAX.DIST. FROM WATER SUPPLY	inch	NA
MAX.DIST. FROM MACHINE	inch	NA
COUNTER HOLE DIAMETER	inch	NA

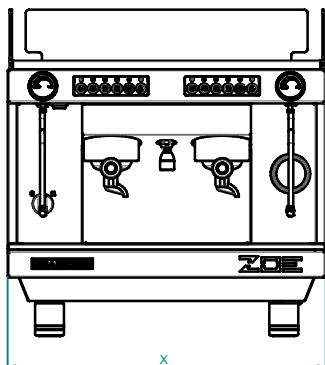


MODEL _ZOE KOMPACT

FRONT VIEW

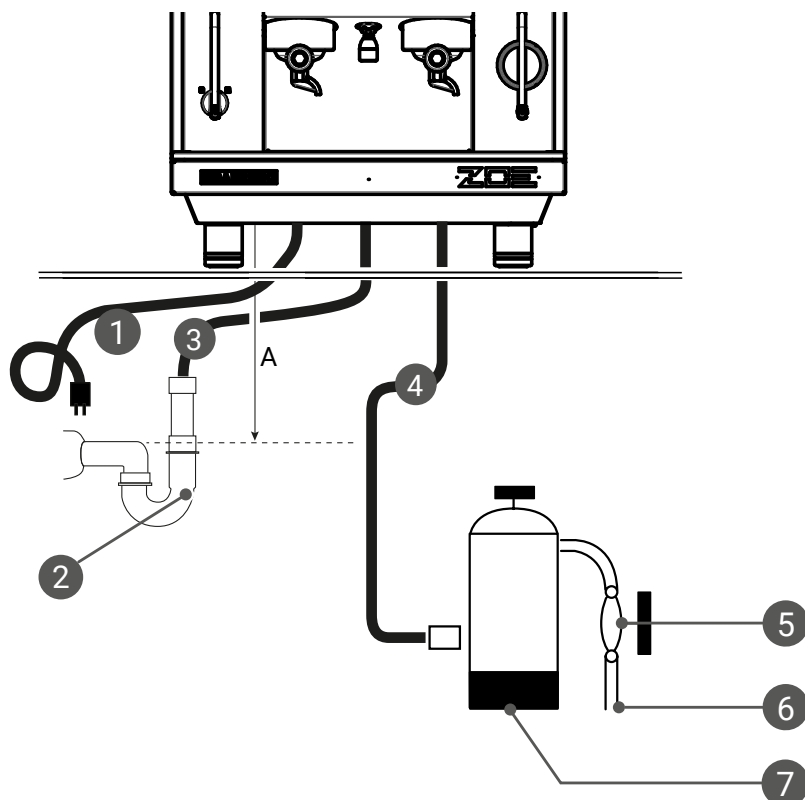

TOP VIEW

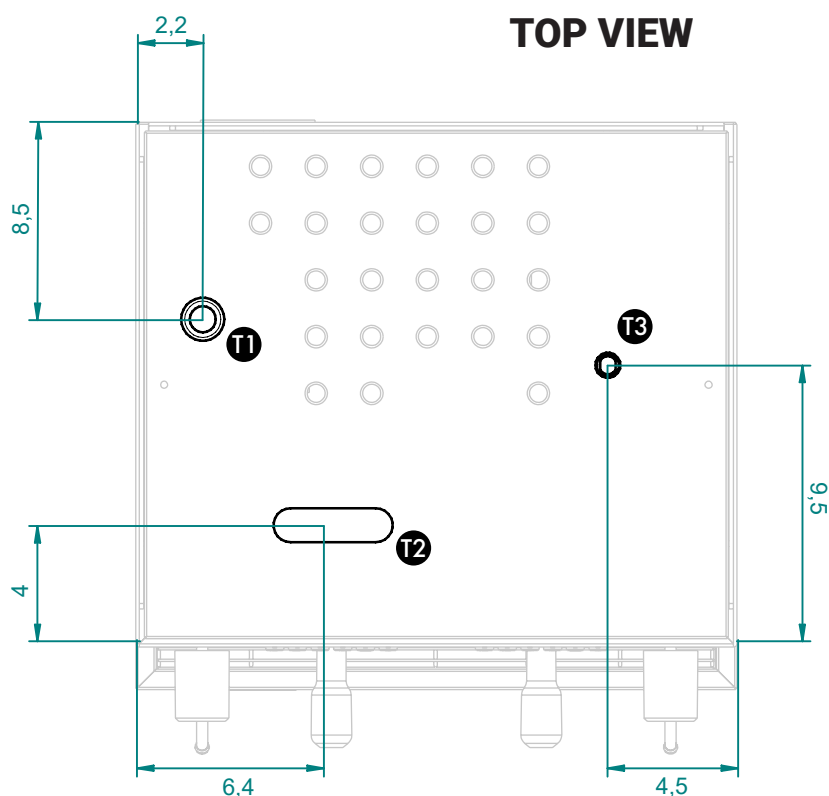

**Check with your local authorities
for rules and regulations**

INFO INSTALLATION

1	110-120 / 208-240V single phase elec. supply to espresso machine
2	Drain
3	1/2" flexible drainline
4	3/8" compression cold water supply line suggested max.
5	gate valve
6	3/8" cold water supply
7	water filter required (not provided), see water specifications
A	The drain must be placed at least 7,8 inches below the machine

WATER SPECIFICATION

Sanremo caffè machines recommends that your filtration system produces water with the following properties:

T.D.S	30 - 150 ppm
Total Hardness	Below 85 ppm
Iron	0 ppm
Total Chlorine	0 ppm
pH	6.5 - 8
Alkalinity	35 - 75 ppm
Chloride	5 - 15 ppm
Line Pressure	29 - 65 PSI
Flow Rate	2 GPM or 8 LPM

Maximum impurity level of 60÷85 ppm (possibly obtainable by inserting a filter in line)

Pressure reducer if the supply pressure is higher than 6 bar (87 PSI).

T1	INLET WATER CONNECTION
T2	DRAIN HOSE OUTLET
T3	POWER SUPPLY OUTLET